




EEC-LR-2T – Emergency Exit Combo
with 2 Top mounted heads
 Thermoplastic Housing
 Self Powered
 LED Lamps

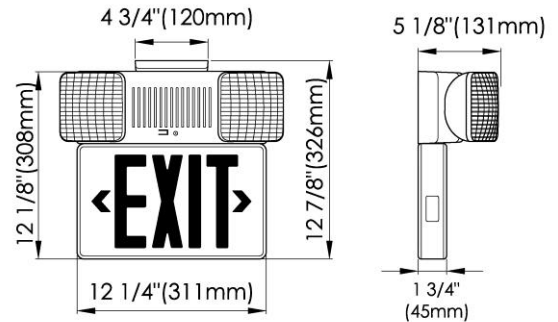

DESCRIPTION

The EEC-LR-2T (LED Red) and EEC-LG-2T (LED Green) are economical and energy saving Exit signs with two, Top mounted heads. The Exit signs' LED lamps provide a maximum of energy savings potential and the battery pack allows the unit to be self powered during power outages.

APPLICATION

Suitable for use in almost any commercial or light industrial application.

OPTIONS (add suffix)

BLK – Black Housing.
 SAL – SALIDA version for Latin American markets.



APPROVALS

UL924.
 UL listed for damp locations use.
 Life Safety NFPA 101.

HOUSING

The housing is made of injection molded thermoplastic making it impact resistant and corrosion proof. UL94-5V rated.

MOUNTING

Easy snap fit canopy can be used for end mounting, or knockouts can be used for surface mounting. Included second face allows the unit to be used as a single or double face exit sign. Snap fitting, replaceable chevrons for direction indication.

LAMPS

Long life Light Emitting Diode (LED) lamps in the Exit sign portion provide the maximum in energy savings. The emergency lighting heads have 2 x 5.4 W incandescent lamps.

ELECTRICAL/BATTERY

- Dual voltage input 120/277 VAC, 60 Hz.
- Maintenance free, Sealed Lead Calcium 6V, 4.5 AH battery with a maximum full recharge time of 24 hours. Minimum 1 ½ hour emergency operation.
- Low voltage disconnect of the battery prevents deep discharge and maintains good battery life.
- Fully automatic, solid state charger.
- Test switch with LED charge indicator/AC voltage indicator.
- Line latching feature prevents the unit from turning on during installation to a non-energized AC circuit. Saves labor since the installer does not have to return to connect the battery terminals after the building is energized.

Catalog Number	Emergency	Lamp Type EXIT Section	Lamp Type Emergency Section	Wording	Input Power 120V	Input Power 277V	Weight (Lbs)	Volume (cu. ft.)
EEC-LR-2T	Self Powered	LED Red	2 x 5.4 W Incan.	EXIT	4.0	4.0	7.0	0.78
EEC-LG-2T	Self Powered	LED Green	2 x 5.4 W Incan.	EXIT	4.0	4.0	7.0	0.78
EEC-LR-2T-SAL	Self Powered	LED Red	2 x 5.4 W Incan.	SALIDA	4.0	4.0	7.0	0.78
EEC-LG-2T-SAL	Self Powered	LED Green	2 x 5.4 W Incan.	SALIDA	4.0	4.0	7.0	0.78