



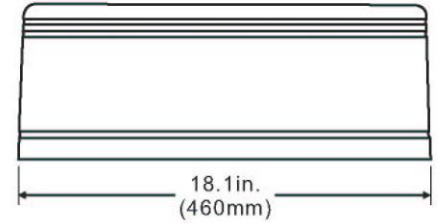

Lumenform

WHR – Wallpack Half Round

LED 47, 63, 95 W
Metal Halide Pulse Start 70 – 150 W
High Pressure Sodium 35 – 150 W
Fluorescent Quad Tube 1 x 26 – 42 W



DESCRIPTION

The WHR is an architectural grade full cutoff wall pack for up to 95W LED lamps, HID 150W lamps or Fluorescent quad tube 1 x 42W lamps. HID and FL distributions include WT - Wide Throw, and UD - UP and Down. The WT and distributions are fully Dark Sky compliant. U.L. listed for wet locations.

APPLICATION

Ideal for security lighting around commercial, industrial and residential buildings where maintaining an esthetically appealing dayform appearance is important.

CONSTRUCTION

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance. Silicon rubber gasket for long life. Clear tempered glass lens, impact and heat resistant.

BALLAST / DRIVER

Universal Voltage (120-277V) electronic drivers / ballasts for LED and compact fluorescent. High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts. Reactor 120V ballasts for HPS. Minimum starting temperature is -20°F (-30°C) for MP, -40°F (-40°C) for HPS.

MOUNTING

Quick Install bracket (see below) makes for fast installations.

REFLECTOR

Die formed, anodized aluminum. Available in two optical distributions for HID and FL. WT – Wide Throw
UD – 50% UP and 50% Down

LED DATA

LED Watts	System Watts	Delivered Lumens	HID Equal
47	52	4,459	200W
63	77	7,089	250+W
95	117	10,634	400W

Input Voltage = 120-277V, 50/60 Hz

QUICK INSTALL BRACKET



Level Bubble

Attach Quick Install bracket to wall or junction box.



Slide fixture onto Quick Install bracket and make electrical connections.



Secure fixture to Quick Install bracket with screws.

CATALOG NUMBER LOGIC

WHR-

Product Series
WHR = Wallpack
Half
Round

MP

Lamp Type
LD = LED
MP = Metal Halide
Pulse Start
HP = High Pressure
Sodium
FL = Fluorescent
quad tube

150-

Lamp Wattage
(LED) 47, 63, 95
(MP) 70, 100, 150
(HPS) 35, 50, 70,
100, 150
(FL) 226 = 2 x 26W
232 = 2 x 32W
242 = 2 x 42W

MT-

Voltage
MT = Multi Tap
120/208/240/277V
UV = Universal Voltage
120 – 277 V
120V = 120V
480V = 480V

UD-

Light Distribution
WT = Wide Throw
UD = Up & Down

L

Lamp
Blank for LED
L = Lamp
Included