




Lumenform

WPL - Wall Pack Large
LED 108, 126 W
Metal Halide Pulse Start 320 - 400 W
High Pressure Sodium 400 W
Induction 80 - 120 W

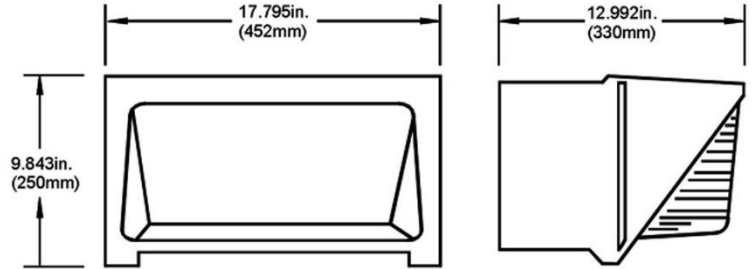

DESCRIPTION

The WPL is designed for up to LED 126W lamps, HID 400W lamps or Induction 120W lamps. Its rugged die cast aluminum housing and borosilicate glass lens give it long lasting performance. U.L. listed for wet locations.

APPLICATION

Ideal for security lighting around commercial, industrial and residential buildings where higher mounting heights are available and a large area needs to be lit.

CONSTRUCTION

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance.

Die formed, anodized aluminum reflector.

Silicon rubber gasket for long life.

Prismatic borosilicate glass lens, impact and heat resistant. The door assembly is secured with a stainless steel chain to ensure easy relamping without lens breakage.

BALLAST / DRIVER

Universal Voltage (120-277V) electronic drivers for LED. High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts for HID. Minimum starting temperature is -20°F (-30°C) for MP, -40°F (-40°C) for HPS.

LED DATA

LED Watts	System Watts	Delivered Lumens	HID Equal
108	133	11,394	400W
126	150	14,000	400+W

CRI = 70

Color Temperature = 5700 K

Input Voltage = 120-277V, 50/60 Hz

CATALOG NUMBER LOGIC

WPL-

Product Series
WPL = Wall Pack
Large

MP

Lamp Type
LD = LED
MP = Metal Halide
Pulse Start
HP = High Pressure
Sodium
ID = Induction

400-

Lamp Wattage
(LD) 108, 126
(MP) 320, 350, 400
(HPS) 400
(ID) 80, 100, 120

MT-

Voltage
MT = Multi Tap
120/208/240/277V
UV = Universal Voltage
120 - 277 V
480V = 480V

L

Lamp
L = Lamp
Included

OPTIONS

WPL-WG – Wire Guard for WPM or WPL fixture.

WPL-GS – Glare Shield for WPM or WPL fixture.

WPL-VS – Vandal Shield for WPM or WPL fixture.

PC-XXX – Button Photocell (XXX = specify voltage).