




Lumenform

WPS - Wall Pack Small
LED 30, 45, 70 W
Metal Halide Pulse Start 50 – 150 W
High Pressure Sodium 35 – 150 W
Fluorescent Quad Tube 2 x 26 - 42 W

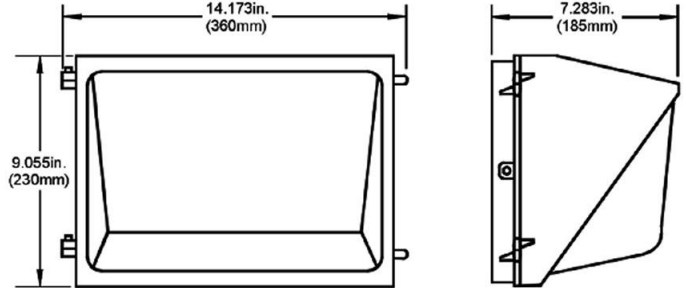

DESCRIPTION

The WPS is designed for up to LED 70W lamps, HID 150W lamps or Fluorescent 2 x 42W lamps. Its rugged die cast aluminum housing and either polycarbonate lens or borosilicate glass lens give it long lasting performance.
U.L. listed for wet locations.

APPLICATION

Ideal for security lighting around commercial, industrial and residential buildings where lower mounting heights are available.

CONSTRUCTION

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance.
Die formed, anodized aluminum reflector.
Silicon rubber gasket for long life.
Polycarbonate lens for LED versions.
Prismatic borosilicate glass lens for other versions, impact and heat resistant. The door assembly is secured with a stainless steel chain to ensure easy relamping without lens breakage.

LED DATA

Nominal Watts	Delivered Lumens	HID Equal
30	3,306	150W
45	4,485	200W
70	6,704	250W

CRI = 80+

Color Temperature = 5000 K

Input Voltage = 120-277V, 50/60 Hz

BALLAST / DRIVER

Universal Voltage (120-277V) electronic drivers / ballasts for LED and compact fluorescent. High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts for Reactor 120V ballasts for HPS. Minimum starting temperature is -20°F (-30°C) for MP, -40°F (-40°C) for HPS.

CATALOG NUMBER LOGIC

WPS-

Product Series

WPS = Wall Pack Small

LD

Lamp Type

LD = LED
MP = Metal Halide Pulse Start
HP = High Pressure Sodium
FL = Fluorescent quad tube

70-

Lamp Wattage

(LED) 30, 45, 70
(MP) 50, 70, 100, 150
(HPS) 35, 50, 70, 100, 150
(FL) 226 = 2 x 26W
232 = 2 x 32W
242 = 2 x 42W

UV

Voltage

MT = Multi Tap
120/208/240/277V
UV = Universal Voltage
120 – 277 V
120V = 120V
480V = 480V

T

Lamp

Blank for LED
L = Lamp Included (MP, HP, & FL)

OPTIONS

WPS-WG – Wire Guard for WPS fixture.
WPS-GS – Glare Shield for WPS fixture.
WPS-VS – Vandal Shield for WPS fixture.

PC-XXX – Button Photocell (XXX = specify voltage).
EM – Emergency ballast for FL versions.