




**ASB – Arealighting Shoe Box
Arm Mounting**
Metal Halide Pulse Start 200 – 400 W
Metal Halide 175 – 400 W
High Pressure Sodium 150 – 400 W
Induction 80 W

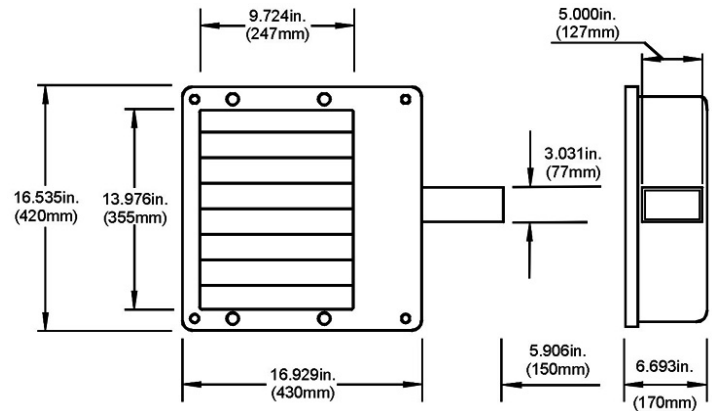

DESCRIPTION

The ASB is an aesthetic Arealighting Shoe Box for up to 400W HID lamps or 80W induction lamps. It comes with a 6" arm for mounting on poles. U.L. listed for wet locations.

APPLICATION

Idea for lighting parking lots and other large open areas where aesthetics are important.

HOUSING

The housing is made of high pressure die cast aluminum and finished in a dark bronze polyester powder coat paint finish for lasting corrosion resistance.

BALLAST

High Power Factor, Constant Wattage Autotransformer ballasts. Multi Tap (120/208/240/277V) or 480V ballasts. Minimum starting temperature is -20°F (-30°C) for MP and MH, -40°F (-40°C) for HPS.

SOCKET

Mogul base, 4KV pulse rated porcelain socket.

MOUNTING

6" (150 mm) Die cast aluminum arm with dark bronze polyester powder coat paint finish. Optional 12" or 18" mounting arms.

REFLECTOR

Die formed, anodized aluminum.

GASKET

Silicone rubber for long life.

LENS

Clear tempered glass, impact and heat resistant.

EPA

Effective Projected Area at 0° tilt is 0.95 (includes mounting arm).

CATALOG NUMBER LOGIC

ASB-

Product Series
ASB = Arealighting Shoe Box

MP

Lamp Type
MP = Metal Halide Pulse Start
MH = Metal Halide
HP = High Pressure Sodium
ID = Induction

400-

Lamp Wattage
(MP) 200, 250, 320, 350, 400
(MH) 175, 250, 400
(HPS) 150, 250, 400
(DI) 80

MT-

Voltage
MT = Multi Tap
120/208/240/277V
480V = 480V

AM-

Mounting
AM = Arm Mounting Square Poles
AMR = Arm Mounting Round Poles

L

Lamp
L = Lamp
Included

OPTIONS

ASB-AM12 – 12" mounting arm.
ASB-AM18 – 18" mounting arm.

PC-XXX – Button Photocell (XXX = specify voltage)
PCTL-XXX Twist Lock receptacle and photocell (XXX = specify voltage)